

ST 3000 FF Fieldbus Pressure Transmitter Specifications

34-ST-03-72 April 2010



Introduction

The **ST 3000 Fieldbus Transmitter** is designed as an enhancement to smart or analog transmitters and may use the existing transmitter signal lines for power and communication for ease of field upgrade. In addition to features currently offered with other smart transmitters, the following key features are now available with the ST 3000 Fieldbus transmitter:

- Fieldbus Foundation™ registration
- Backup Link Active Scheduler (LAS).
- Analog Input and PID Control Function Blocks.
- Custom polynomial for level and flow linearization.
- “Electronic Nameplate” data and download via the bus.

ST 3000 Fieldbus transmitters accurately measure differential, gauge, or absolute pressure. A piezoresistive sensor is combined with state-of-the-art electronics to provide a digital output signal proportional to the measured variable.

Accuracy is enhanced by compensating the output signal for the effects of ambient temperature and static pressure changes and for device non-linearities. Typical process control applications include measuring the fluid flow rate through a pipe, or measuring the level of a liquid in a tank.

Communication through a fieldbus host system provides labor saving capabilities such as remote transmitter adjustments and diagnostics. An operator can adjust and display operating information, re-range the transmitter without applied calibration pressures, initiate diagnostic tests, and read the input pressure and output signal, all without leaving the control room.



This, when coupled with the transmitter's wide span adjustment, means that the ST 3000 Fieldbus transmitter is extremely adaptable to a variety of applications, and it can easily be adjusted to meet changing requirements.

When digitally integrated with Honeywell's Experion® Process Knowledge System or other TDC/TPS systems, ST 3000 instruments provides local measurement accuracy to the system level without adding typical A/D and D/A converter inaccuracies as well as providing advantages from the many other on-board advanced diagnostic features. Honeywell's high-performance ST 3000 S100 transmitters lead the industry in:

- Accuracy
- Stability
- Reliability
- Rangeability
- Warranty


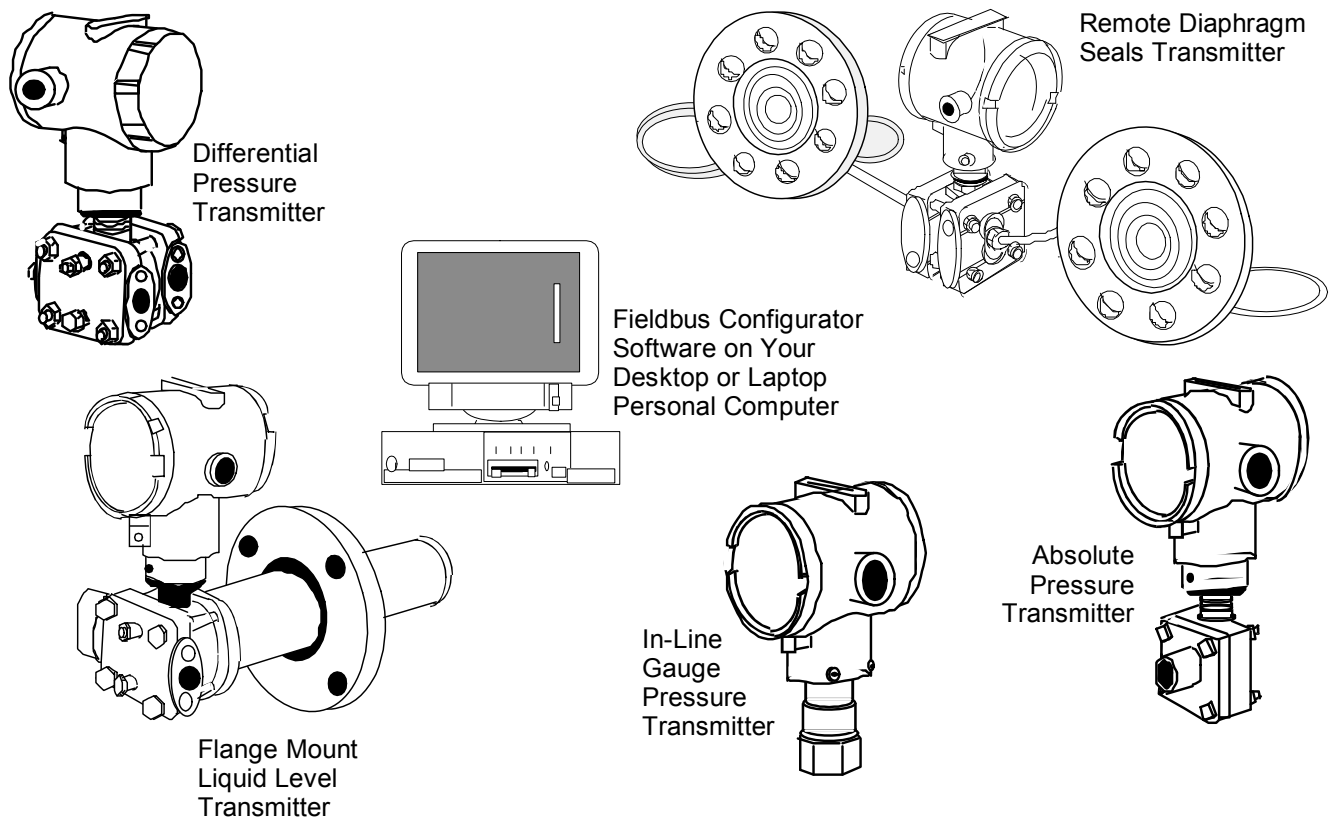


Figure 1 -- Typical ST 3000 Fieldbus Transmitter Types and Fieldbus Configurator

As shown in [Figures 1](#) and [2](#), the ST 3000 Fieldbus family consists of a full line of pressure transmitters. Model selection is simplified because the ST 3000 Fieldbus transmitter provides a versatile range of span adjustments as listed in Table 1, which result in a turndown ratio as high as 400 to 1.

And, no matter what model or type of transmitter selected, the same configuration tool communicates with all of them.

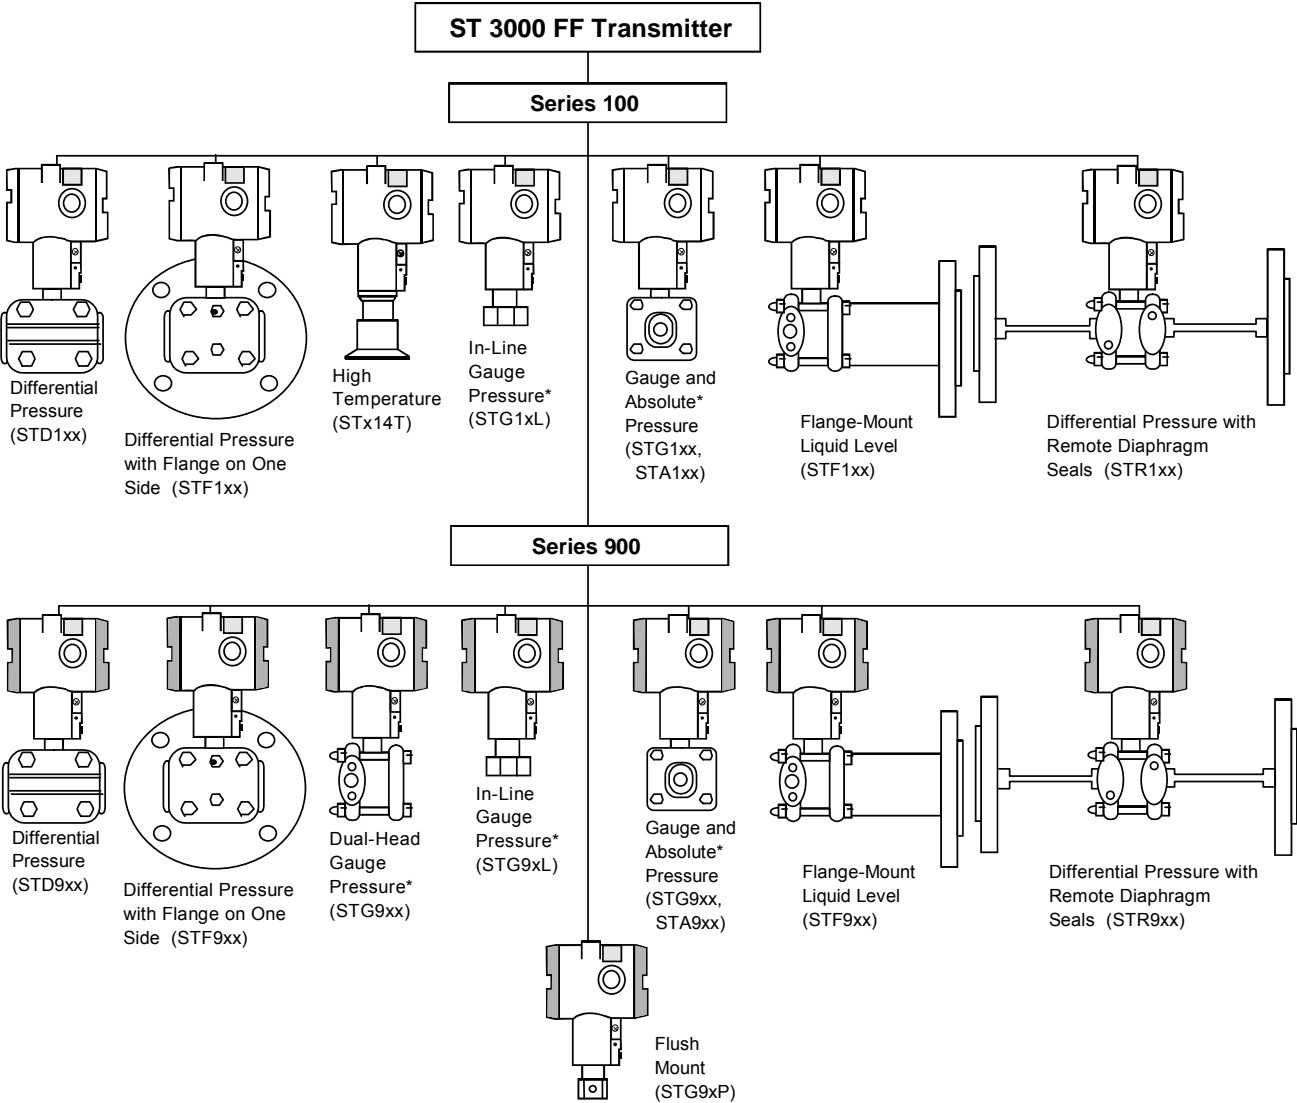

* These models also available with remote diaphragm seals.

Figure 2 -- ST 3000 Fieldbus Transmitter Family Tree

Operating Conditions – All Models**Table 1 -- Summary of ST 3000 Fieldbus Transmitter Family Model Number Selections**

Model Number	Available Range	Minimum Span	Turndown Ratio
Differential Pressure Transmitters			
STD 110	0 to 10 inH ₂ O (0 to 25 mbar)	0.4 inH ₂ O (1 mbar)	25 to 1
STD 120	0 to 400 inH ₂ O (0 to 1000 mbar)	1 inH ₂ O (2.5 mbar)	400 to 1
STD924	0 to 400 inH ₂ O (0 to 1000 mbar)	10 inH ₂ O (25 mbar)	40 to 1
STD125	0 to 600 inH ₂ O (0 to 1500 mbar)	25 inH ₂ O (62.5 mbar)	24 to 1
STD130, STD930	0 to 100 psi (0 to 7 bar)	5 psi (0.35 bar)	20 to 1
STD170, STD974	0 to 3000 psi (0 to 210 bar)	100 psi (7 bar)	30 to 1
Gauge or Absolute Pressure Transmitters			
STG93P	0 to 100 psi (0 to 7 bar)	5 psi (0.35 bar)	20 to 1
STG14T	0 to 500 psi (0 to 35 bar)	0.9 psi (0.063 bar)	550 to 1
STG140, STG14L	0 to 500 psi (0 to 35 bar)	5 psi (0.35 bar)	100 to 1
STG944, STG94L	0 to 500 psi (0 to 35 bar)	20 psi (1.4 bar)	25 to 1
STG170, STG17L	0 to 3000 psi (0 to 210 bar)	100 psi (7 bar)	30 to 1
STG974, STG97L	0 to 3000 psi (0 to 210 bar)	300 psi (21 bar)	10 to 1
STG18L, STG180	0 to 6000 psi (0 to 415 bar)	100 psi (7 bar)	60 to 1
STG98L	0 to 6000 psi (0 to 415 bar)	500 psi (35 bar)	12 to 1
STA122, STA922	0 to 780 mmHgA (0 to 1040 mbarA)	50 mmHgA (67 mbarA)	15 to 1
STA140	0 to 500 psia (0 to 35 barA)	5 psia (0.35 barA)	100 to 1
STA940	0 to 500 psia (0 to 35 barA)	20 psia (1.4 barA)	25 to 1
Flange Mounted Differential Pressure Transmitters			
STF128, STF12F	0 to 400 inH ₂ O (0 to 1000 mbar)	10 inH ₂ O (25 mbar)	40 to 1
STF924, STF92F	0 to 400 inH ₂ O (0 to 1000 mbar)	25 inH ₂ O (62.5 mbar)	16 to 1
STF132, STF13F, STF932, STF93F	0 to 100 psi (0 to 7 bar)	5 psi (0.35 bar)	20 to 1
STF14F	0 to 600 inH ₂ O (0 to 1500 mbar)	25 inH ₂ O (62.5 mbar)	24 to 1
STF14T	0 to 500 psi (0 to 35 bar)	0.9 psi (0.063 bar)	550 to 1
Remote Seal Differential or Gauge Pressure Transmitters			
STR12D	0 to 400 inH ₂ O (0 to 1000 mbar)	10 inH ₂ O (25 mbar)	40 to 1
STR13D	0 to 100 psi (0 to 7 bar)	5 psi (0.35 bar)	20 to 1
STR93D	0 to 100 psi (0 to 7 bar)	0.9 psi (0.063 bar)	110 to 1
STR14G	0 to 500 psi (0 to 35 bar)	5 psi (0.35 bar)	100 to 1
STR94G	0 to 500 psi (0 to 35 bar)	20 psi (1.4 bar)	25 to 1
STR17G	0 to 3000 psi (0 to 210 bar)	100 psi (7 bar)	30 to 1
STR14A	0 to 500 psia (0 to 35 barA)	5 psia (0.35 barA)	100 to 1

Foundation Fieldbus Functions of the ST 3000 Fieldbus Transmitter

The **ST 3000 Fieldbus Transmitter** has been designed to fully comply with Fieldbus Foundation specifications. As such, it contains the software architecture defined in the specifications.

Code Download

The ST 3000 Fieldbus transmitter is designed to support code download over the fieldbus. This allows the user to easily update the device software without changing PROMS.

As shown in Figure 3, the ST 3000 Fieldbus transmitter contains following block objects:

- 1 Resource block
- 1 Transducer block
- 1 Analog Input (AI) function block
- 1 Proportional Integral Derivative (PID) Control function block.

Resource Block

The resource block contains data and parameters related to overall operation of the device and the Function Block Application Process (FBAP). Parameters that reside in the resource block describe the hardware-specific characteristics of the device and support device application download operations.

Transducer Block


In the ST 3000 Fieldbus transmitter, the transducer block:

- Takes sensor measurements from the signal processing software,
- Performs a linearization,
- Executes additional math functions, if selected.

The transducer block has the ability to put the measured pressure value through a fifth-order polynomial equation. See Figure 4. This processing enables it to closely approximate the volume of an irregularly shaped tank or vessel, or to compensate the flow rate for variations in Reynolds Number. The user must provide the coefficients for this equation, as the device has no knowledge of the shape of the vessel or the type of primary flow element being used.

Analog Input Block


The Analog Input (AI) function block takes the output signal from the transducer block and makes it available to other function blocks as its output. For example, the output of the AI function block may be linked as an input to the transmitter's PID Control function block.

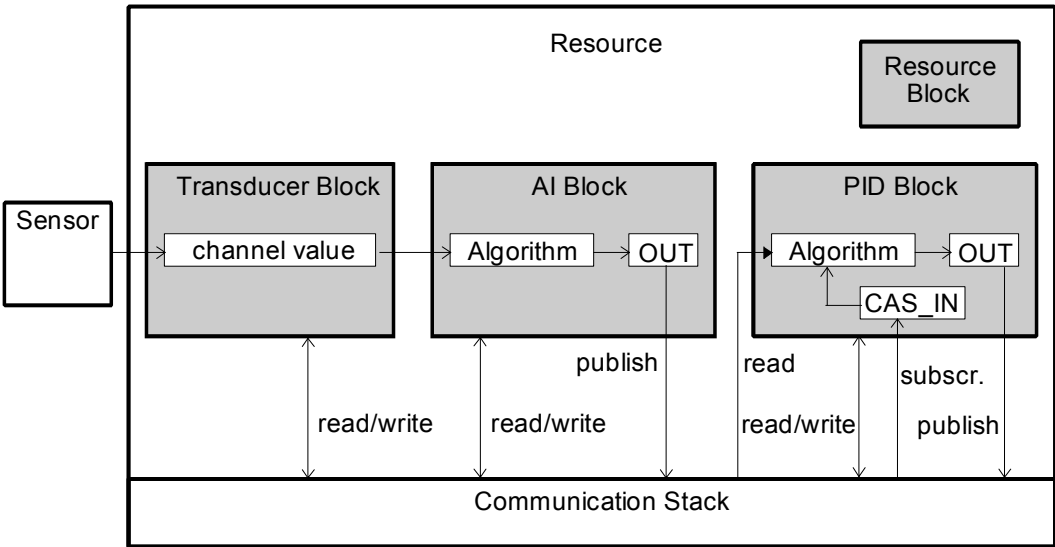

24108

NOTE: Not all parameters are shown.

Figure 3 — ST3000 Fieldbus Function Block Application Process (FBAP) Overview

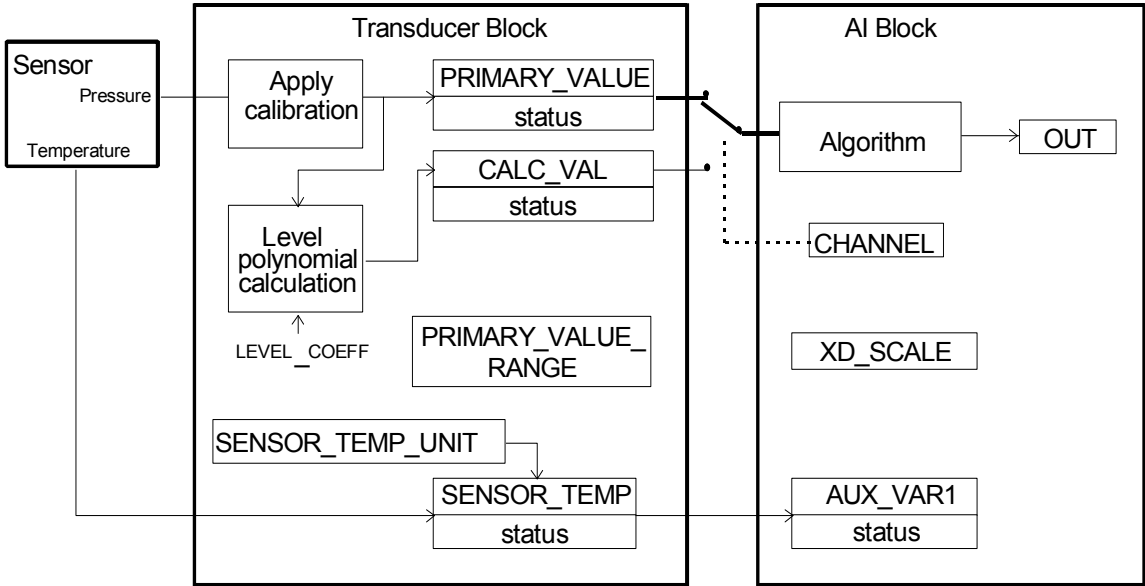

24109

Figure 4 — Transducer and Analog Input Function Block Diagram

Referring to the block diagram in Figure 4, two values from the transducer block are supplied as inputs to the AI block:

1. PRIMARY_VALUE or CALC_VAL can be selected using the CHANNEL parameter as the first input. (See Table 2.)
2. SENSOR_TEMP is supplied as the second input to the AI block.

The AI block OUT parameter value can be shown on an optional local meter display in selected engineering units (Option SM).

Table 2 — CHANNEL Parameter Description		
When CHANNEL Parameter equals . . .	The Value Selected (from Transducer Block) is . . .	
1	PRIMARY_VALUE, which is the direct pressure measurement, value from the sensor.	
2	CALC_VAL which is the result of the Level Polynomial calculation.	
Other	Error - the AI block remains in (O/S) mode.	

PID Control Function Block	Table 3—Honeywell PID Parameters	
<p>The PID Control function block provides you with the choice of either an Ideal (the default) or Robust PID control equation. The Ideal PID equation uses standard parameters that are defined in Fieldbus Foundation specifications. The Robust equation uses the standard fieldbus parameters plus Honeywell-defined extension parameters for PID control. A description of these parameters is given in Table 3.</p> <p>The PID output is adjusted by tuning constants. Three tuning constants are used in the Ideal PID equation. The robust PID uses four tuning constants.</p> <ol style="list-style-type: none"> 1. GAIN is the tuning constant of the Proportional term. 2. RESET is the tuning constant of the Integral term. 3. RATE is the tuning constant of the Derivative term. RATE is usually modified by a lag, which is set at some fixed ratio higher than the rate time, to create a rate gain. There is no lag with the rate in this implementation. 4. OUT_LAG is the fourth tuning constant used in the robust PID, it adds roll off to the output response. The action is similar to PID with rate gain. <p>Input to the PID block is configurable. For example, any value which is broadcast on the bus can be linked as the input to the PID.</p>	Parameter Name	Description/Parameter Contents
	PID_FORM	<p>Configuration parameter specifies the IDEAL or ROBUST PID equation to be used:</p> <ul style="list-style-type: none"> • IDEAL PID (default). Non-Interactive form of a three mode control algorithm that provides Proportional, Integral and Derivative control action. Linear and non-linear gain parameters are available. • ROBUST PID. The same as Ideal PID. Additionally, the algorithm supports a user-configurable lag filter applied to calculated output value. (See OUT_LAG parameter.) Linear and non-linear gain parameters are available.
	ALGO_TYPE	<p>Configuration parameter specifies algorithm type which can be A,B, or C:</p> <ul style="list-style-type: none"> • Type "A" equation where Proportional, Integral and Derivative act on ERROR. • Type "B" equation where Proportional and Integral act on ERROR and Derivative acts on PV. • Type "C" equation where Integral acts on ERROR and Proportional and Derivative act on PV.
	OUT_LAG	<p>Time constant of single exponential lag filter applied to the OUT parameter (primary output). Units (in seconds). The time constant for Ideal PID lag filter is fixed at 1/16 of a second and is not configurable. The time constant is adjustable for the Robust PID.</p>
	GAIN_NLIN	<p>Dimensionless gain factor. When the gain factor is multiplied by absolute value of the error and added to the linear GAIN, the result is a gain response that is proportional to the deviation.</p>
	GAIN_COMP	<p>The composite gain quantity comprising both linear and non-linear gain. Read only parameter.</p>
	ERROR_ABS	<p>Absolute value of the difference between WSP and PV. Read only parameter.</p>
	WSP	<p>Working setpoint. This is the setpoint value after absolute and rate limits have been applied. Deviation alarms are computed on this value. Read only parameter.</p>

Fieldbus Device Descriptions (DD)

Standardized descriptions and definitions are used to describe field devices that promote the interoperability of fieldbus devices. One of these standardized "tools" is the Device Description (DD).

A typical DD contains information about the device parameters and operation, such as:

- Attributes like coding, name, engineering unit, write protection, how to display parameters, etc.
- Maintenance, calibration and other necessary operation information.

Standard DD's for function blocks and transducer blocks are maintained by the Fieldbus Foundation.

Honeywell and other manufacturers use these DD's to describe the standard features of their fieldbus devices, as well as providing device-specific extensions that describe custom features unique to that particular device.

Certifications

	Type of Protection	Comm. Option	Field Parameters	Temp. Codes
FM Approvals SM	Explosionproof: Class I, Division 1, Groups A, B, C, D locations Dust Ignition Proof: Class II, III, Division 1, Groups E, F, G locations, Enclosure Type 4X	All	All	T5 Ta = 93°C
	Intrinsically Safe: Class I, II, III, Division 1, Groups A, B, C, D, E, F, G locations, Enclosure Type 4X	4-20 mA / DE	Vmax = 42.4V Imax = 225mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = 93°C
		4-20 mA /	Vmax = 30V Imax = 225mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = 93°C
	Intrinsically Safe: Class I, II, III, Division 1, Groups A, B, C, D, E, F, G locations; Class 1, Zone 0, AEx ia Group IIC, Enclosure Type 4X / IP 66/67	Fieldbus – Entity	Vmax = 32V Imax = 120mA Ci = 4.2nF Li = 0 Pi = 0.84W	T4 Ta = 40°C T3 Ta = 93°C
		Fieldbus – Entity	Vmax = 24V Imax = 250mA Ci = 4.2nF Li = 0 Pi = 1.2W	T4 Ta = 40°C T3 Ta = 93°C
		FISCO	Vmax = 17.5V Imax = 380mA Ci = 4.2nF Li = 0 Pi = 5.32W	T4 Ta = 40°C T3 Ta = 93°C
	Nonincendive: Class I, Division 2, Groups A, B, C, D locations, Enclosure Type 4X	4-20 mA / DE	Vmax = 42.4V Imax = 225mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = 93°C
		4-20 mA / HART	Vmax = 30V Imax = 225mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = 93°C
	Nonincendive: Class I, Division 2, Groups A, B, C, D; Suitable for: Class II, Division 2, Groups F&G; Class III, Division 2; Class I, Zone 2, Group IIC, Enclosure Type 4X / IP 66/67	Fieldbus – Entity	Vmax = 32V Imax = 120mA Ci = 4.2nF Li = 0 Pi = 0.84W	T4 Ta = 40°C T3 Ta = 93°C
		Fieldbus – Entity	Vmax = 24V Imax = 250mA Ci = 4.2nF Li = 0 Pi = 1.2W	T4 Ta = 40°C T3 Ta = 93°C
		FNICO	Vmax = 32V Ci = 4.2nF Li = 0	T4 Ta = 40°C T3 Ta = 93°C

* Li = 0 except Li = 150µH when Option ME, Analog Meter, is selected. FM ApprovalsSM is a service mark of FM Global

	Type of Protection	Comm. Option	Field Parameters	Temp. Codes
Canadian Standards Association (CSA)	Explosion Proof: Class I, Division 1, Groups B, C, D locations Dust Ignition Proof: Class II, III, Division 1, Groups E, F, G locations, Enclosure Type 4X	All	All	T4 Ta = 93°C
	Intrinsically Safe: Class I, II, III, Division 1, Groups A, B, C, D, E, F, G locations, Enclosure Type 4X	4-20 mA / DE	Vmax = 42V Imax = 225mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = 93°C
		4-20 mA / HART	Vmax = 42V Imax = 225mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = 93°C
		Fieldbus – Entity	Vmax = 24V Imax = 250mA Ci = 4.2nF Li = 0 Pi = 1.2W	T4 Ta = 40°C T3 Ta = 93°C
	Nonincendive: Class I, Division 2, Groups A, B, C, D locations, Enclosure Type 4X	4-20 mA / DE	Vmax = 42.4V Imax = 225mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = 93°C
		4-20 mA / HART	Vmax = 30V Imax = 225mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = 93°C
		Fieldbus – Entity	Vmax = 24V Imax = 250mA Ci = 4.2nF Li = 0 Pi = 1.2W	T4 Ta = 40°C T3 Ta = 93°C
	Canadian Registration Number (CRN):	All ST 3000 models except STG19L, STG99L, STG170 and STG180 have been registered in all provinces and territories in Canada and are marked CRN: 0F8914.5C.		

IECEX International Electrotechnical Commission (LCIE)	Flameproof, Zone 1: Ex d IIC, Enclosure IP 66/67	All	All	T5 Ta = –50 to 93°C T6 Ta = –50 to 78°C
	Intrinsically Safe, Zone 0/1: Ex ia IIC, Enclosure IP 66/67	4-20 mA / DE	Ui = 30V Ii = 100mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = –50 to 93°C T5 Ta = –50 to 85°C T6 Ta = –50 to 70°C
		4-20 mA / HART	Ui = 30V Ii = 100mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = –50 to 93°C T5 Ta = –50 to 63°C T6 Ta = –50 to 48°C
		Fieldbus	Ui = 24V Ii = 250mA Ci = 4.2nF Li = 0 Pi = 1.2W	T3 Ta = –50 to 93°C T4 Ta = –50 to 40°C

* Li = 0 except Li = 150µH when Option ME, Analog Meter, is selected.







	Type of Protection	Comm. Option	Field Parameters	Temp. Codes
SAEx (South Africa)	Flameproof, Zone 1: Ex d IIC, Enclosure IP 66/67	All	All	T5 Ta = -50 to 93°C T6 Ta = -50 to 78°C
	Intrinsically Safe, Zone 0/1: Ex ia IIC, Enclosure IP 66/67	4-20 mA / DE	Ui = 30V Ii = 100mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = -50 to 93°C T5 Ta = -50 to 85°C T6 Ta = -50 to 70°C
		4-20 mA / HART	Ui = 30V Ii = 100mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = -50 to 93°C T5 Ta = -50 to 63°C T6 Ta = -50 to 48°C
		Fieldbus	Ui = 24V Ii = 250mA Ci = 4.2nF Li = 0 Pi = 1.2W	T3 Ta = -50 to 93°C T4 Ta = -50 to 40°C
	Multiple Marking: Flameproof, Zone 1: Ex d IIC, Enclosure IP 66/67 Intrinsically Safe, Zone 0/1: Ex ia IIC, Enclosure IP 66/67 The user must determine the type of protection required for installation of the equipment. The user shall then check the box [√] adjacent to the type of protection used on the equipment certification nameplate. Once a type of protection has been checked on the nameplate, subsequently the equipment shall not be reinstalled using any of the other certification types.	4-20 mA / DE	Ui = 30V Ii = 100mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = -50 to 93°C T5 Ta = -50 to 85°C T6 Ta = -50 to 70°C
		4-20 mA / HART	Ui = 30V Ii = 100mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = -50 to 93°C T5 Ta = -50 to 63°C T6 Ta = -50 to 48°C
		Fieldbus	Ui = 24V Ii = 250mA Ci = 4.2nF Li = 0 Pi = 1.2W	T3 Ta = -50 to 93°C T4 Ta = -50 to 40°C

* Li = 0 except Li = 150μH when Option ME, Analog Meter, is selected.

	Type of Protection	Comm. Option	Field Parameters	Temp. Codes
INMETRO (CERTUSP) Brazil	Flameproof, Zone 1: BR-Ex d IIC Enclosure IP 66/67	All	All	T5 Ta = -50 to 93°C T6 Ta = -50 to 78°C
	Intrinsically Safe, Zone 0/1: BR-Ex ia IIC Enclosure IP 66/67	4-20 mA / DE	Ui = 30V Ii = 100mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = -50 to 93°C T5 Ta = -50 to 85°C T6 Ta = -50 to 70°C
		4-20 mA / HART	Ui = 30V Ii = 100mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = -50 to 93°C T5 Ta = -50 to 63°C T6 Ta = -50 to 48°C
		Fieldbus	Ui = 24V Ii = 250mA Ci = 4.2nF Li = 0 Pi = 1.2W	T3 Ta = -50 to 93°C T4 Ta = -50 to 40°C

* Li = 0 except Li = 150µH when Option ME, Analog Meter, is selected.

ST 3000 Pressure Transmitter Marine Certificate (MT Option)	This certificate defines the certifications covered for the ST 3000 Pressure Transmitter family of products, including the SMV 3000 Smart Multivariable Transmitter. It represents the compilation of the five certificates Honeywell currently has covering the certification of these products into marine applications. For ST 3000 Smart Pressure Transmitter and SMV 3000 Smart Multivariable Transmitter
	American Bureau of Shipping (ABS) - 2009 Steel Vessel Rules 1-1-4/3.7, 4-6-2/5.15, 4-8-3/13 & 13.5, 4-8-4/27.5.1, 4-9-7/13. Certificate number: 04-HS417416-PDA
	Bureau Veritas (BV) - Product Code: 389:1H. Certificate number: 12660/B0 BV
	Det Norske Veritas (DNV) - Location Classes: Temperature D, Humidity B, Vibration A, EMC B, Enclosure C. For salt spray exposure; enclosure of 316 SST or 2-part epoxy protection with 316 SST bolts to be applied. Certificate number: A-11476
	Korean Register of Shipping (KR) - Certificate number: LOX17743-AE001
	Lloyd's Register (LR) - Certificate number: 02/60001(E1) & (E2)

	Type of Protection	Comm. Option	Field Parameters	Temp. Codes
ATEX (LCIE)	Flameproof, Zone 1:  Ex d IIC Enclosure IP 66/67	All	All	T5 Ta = -50 to 93°C T6 Ta = -50 to 78°C
	Intrinsically Safe, Zone 0/1:  Ex ia IIC , Enclosure IP 66/67	4-20 mA / DE	Ui = 30V Ii = 100mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = -50 to 93°C T5 Ta = -50 to 85°C T6 Ta = -50 to 70°C
		4-20 mA / HART	Ui = 30V Ii = 100mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = -50 to 93°C T5 Ta = -50 to 63°C T6 Ta = -50 to 48°C
		Fieldbus	Ui = 24V Ii = 250mA Ci = 4.2nF Li = 0 Pi = 1.2W	T3 Ta = -50 to 93°C T4 Ta = -50 to 40°C
	Non-Sparking, Zone 2:  Ex nA IIC (Honeywell), Enclosure IP 66/67	4-20 mA / DE	Ui = 30V Ii = 100mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = -50 to 93°C T5 Ta = -50 to 85°C T6 Ta = -50 to 70°C
		4-20 mA / HART	Ui = 30V Ii = 100mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = -50 to 93°C T5 Ta = -50 to 63°C T6 Ta = -50 to 48°C
		Fieldbus	Ui = 24V Ii = 250mA Ci = 4.2nF Li = 0 Pi = 1.2W	T3 Ta = -50 to 93°C T4 Ta = -50 to 40°C
	Multiple Marking: Flameproof, Zone 1:  Ex d IIC Intrinsically Safe, Zone 0/1:  Ex ia IIC Non-Sparking, Zone 2:  Ex nA IIC NOTE: The user must determine the type of protection required for installation of the equipment. The user shall then check the box [√] adjacent to the type of protection used on the equipment certification nameplate. Once a type of protection has been checked on the nameplate, subsequently the equipment shall not be reinstalled using any of the other certification types.	4-20 mA / DE	Ui = 30V Ii = 100mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = -50 to 93°C T5 Ta = -50 to 85°C T6 Ta = -50 to 70°C
		4-20 mA / HART	Ui = 30V Ii = 100mA Ci = 4.2nF Li = * Pi = 1.2W	T4 Ta = -50 to 93°C T5 Ta = -50 to 63°C T6 Ta = -50 to 48°C
		Fieldbus	Ui = 24V Ii = 250mA Ci = 4.2nF Li = 0 Pi = 1.2W	T3 Ta = -50 to 93°C T4 Ta = -50 to 40°C

* Li = 0 except Li = 150µH when Option ME, Analog Meter, is selected.

European Pressure Equipment Directive (PED) (97/23/EC)	<p>The ST 3000 Smart Pressure Transmitters are in conformity with the essential requirements of the Pressure Equipment Directive.</p> <p>Honeywell ST 3000 Smart Pressure Transmitters are designed and manufactured in accordance with the applicable portions of Annex I, Essential Safety Requirements, and sound engineering practices. These transmitters have no pressurized internal volume, or have a pressurized internal volume rated less than 200 bar (2,900 psig), and/or have a maximum volume of less than 0.1 liter (Article 3, 1.1.(a) first indent, Group 1 fluids). Therefore, these transmitters are not subject to the essential requirements of the directive 97/23/EC (PED, Annex I) and shall not have the CE mark applied.</p> <p>For transmitters rated > 200 bar (2,900 psig) < 1,000 bar (14,500 psig) Honeywell maintains a technical file in accordance with Annex III, Module A, (internal production control) when the CE mark is required. Transmitter Attachments: Diaphragm Seals, Process Flanges and Manifolds comply with Sound Engineering Practice.</p> <p>NOTE: Pressure transmitters that are part of safety equipment for the protection of piping (systems) or vessel(s) from exceeding allowable pressure limits, (equipment with safety functions in accordance with Pressure Equipment Directive 97/23/EC article 1, 2.1.3), require separate examination.</p> <p>A formal statement from TÜV Industry Service Group of TÜV America, Inc., a division of TÜV Süddeutschland, a Notified Body regarding the Pressure Equipment Directive, can be found at www.honeywell.com. A hard copy may be obtained by contacting a Honeywell representative.</p>
CE Mark	<p>Electro Magnetic Compatibility (EMC) (2004/108/EC)</p> <p>All Models: EN 50081-1: 1992; EN 50082-2:1995; EN 61326-1:1997 + A1, A2, and A3 – Industrial Locations</p>
Dual Seal Certification	<p>Dual Seal Certification based on ANSI/NFPA 70-202 and ANSI/ISA 12.27.01 requirements without the use of additional seal protection elements.</p>
Approved Manufacturing Locations	<p>Honeywell Process Solutions - York, PA USA Honeywell Process Solutions – Phoenix, AZ USA Honeywell (Tianjin) Limited – Tianjin, P.R. China Honeywell Automation India Ltd. – Pune 411013 India</p>

Foundation™ Fieldbus is a trademark of the Fieldbus Foundation.

Viton® is a registered trademark of DuPont

HART® is a registered trademark of HART Communications Foundation.

Teflon® is a registered trademark of DuPont.

Hastelloy® C-276 is a registered trademark of Haynes International.

DC® 200 is a registered trademark of Dow Corning.

Monel® 400 is a registered trademark of Special Metals Corporation.

FM ApprovalsSM is a service mark of FM Global

ST 3000® and Experion® are registered trademarks of Honeywell International Inc.

Options

In addition to the comprehensive fieldbus functions, the ST 3000 Fieldbus transmitter also provides these features and benefits:

- **Silicon Sensor and Meter Body**
The ST 3000 Fieldbus transmitter uses the extremely reliable piezoresistive strain gauge. The sensor is an electric wheatstone bridge circuit ion-implanted onto a silicon chip. The sensor is sealed in the meter body from the process by metal diaphragms and silicone fill fluid. This integrated sensor provides three signals (process pressure, sensor temperature, and static pressure) to an interface circuit. The three signals are converted to digital signals for input to the microprocessor.
Every meter body is characterized in the factory for the effects of changing combinations of differential pressure, static pressure and temperature. This information is stored in a characterization PROM (programmable read only memory) located in the meter body of the transmitter. These factors are accessed by the microprocessor to compensate the output signal of the transmitter; providing the user with a very accurate output signal independent of changing process conditions.
- **Improved Accuracy**
Reduces maintenance by requiring fewer recalibrations. Eliminates the need for a special "high accuracy" transmitter.
- **A High Span Turndown Ratio**
Reduces spare parts inventory by eliminating the need for a number of different transmitters with intermediate ranges;
Provides range changing flexibility, reducing the need to replace transmitters to accommodate variations in process operating conditions.
- **Improved Temperature and Static Pressure Compensation**
Improves the operating accuracy, repeatability, and stability of the transmitter.
Reduces the maintenance requirements associated with recalibrating the transmitter during changing temperature and static pressure conditions.
- **Foundation™ Fieldbus Output (Option FF)**
Equips transmitter with FF protocol for use in 31.25 kbit/s FF networks.
- **Diagnostics**
Alerts the operator quickly of any detected diagnostic conditions;
Reduces maintenance time associated with startups and troubleshooting.
- **Write Protection**
Consists of a jumper located on the electronics board that the user can set to allow read and write access, or read only access to device
- **Remote Adjustability**
Allows an operator to select the span, zero, damping, linear or square root output, and forward or reverse action accurately from the control room;
Reduces maintenance time associated with range change or recalibrations;
Allows an operator to communicate with a transmitter in a hard-to-reach location, or in hazardous area without entering the areas.
- **Lightning Protection - LP**
A terminal block with circuitry that protects the transmitter from transient surges induced by nearby lightning strikes.
- **Mounting Bracket - MB, SB, FB**
Available in angle or flat style, and is suitable for either horizontal or vertical mounting on a two-inch pipe or for wall mounting.
- **Indicating Meter- SM**
A local integrated meter option provides an LCD display for digital output and can be configured to display 0 to 100% pressure in selected engineering units as well as device status messages.
- **ST 3000 Fieldbus Operating Power**
The ST 3000 Fieldbus transmitter operates in the range of 9.0 to 32 Vdc @ 20 mA.

Sales and Service

For application assistance, current specifications, pricing, or name of the nearest Authorized Distributor, contact one of the offices below.

Asia Pacific Global Technical Support Field Instruments

Phone: +65 6580 3156
Fax: +65 6445-3033

Australia

Honeywell Limited
Phone: +(61) 7-3846 1255
FAX: +(61) 7-3840 6481
Toll Free 1300-36-39-36
Toll Free Fax:
1300-36-04-70

China – PRC - Beijing

Honeywell China Inc.
Phone: +(86-10) 8458-3280
Fax: +(86-10) 8458-4650

China – PRC - Shanghai

Honeywell China Inc.
Phone: (86-21) 5257-4568
Fax: (86-21) 6237-2826

China – PRC - Chengdu

Honeywell China Inc.
Phone: +(86-28) 6613-5078
Fax: +(86-28) 8678-7061

China – PRC - Xi'an

Honeywell China Ltd - Xi'an.
Phone: +(86-29) 8833-7490
Fax: +(86-29) 8833-7489

China – PRC - Shenzhen-

Honeywell China Inc.
Phone: +(86) 755-2518-1226
Fax: +(86) 755-2518-1221

Indonesia

PT Honeywell Indonesia
Phone: +(62) 21-535-8833
FAX: +(62) 21-5367 1008

Honeywell Automation

India Ltd.
Honeywell Ltd.
Phone: +(91) 6603-9400
Fax: +(91) 6603-9600

Japan

Honeywell Inc.
Phone: +(81) 3 6730 7197
Fax: +(81) 3 6730 7228

Malaysia

Honeywell Engineering Sdn Bhd
Phone: +(603) 7958-4788
Fax: +(603) 7958-8922

New Zealand

Honeywell Limited
Phone: +(64-9) 623-5050
Fax: +(64-9) 623-5060
Toll Free (0800) 202-088

Singapore

Honeywell Pte Ltd.
Phone: +(65) 6580 3278
Fax: +(65) 6445-3033

South Korea

Honeywell Korea Co Ltd
Phone: +(822) 799 6114
Fax: +(822) 792 9015

Thailand

Honeywell Systems (Thailand) Ltd.
Phone: +(662) 693-3099
Fax: +(662) 693-3089

Taiwan R.O.C.

Honeywell Taiwan Ltd.
Phone: +(886-2) 2245-1000
FAX: +(886-2) 2245-3243

SE Asia Countries

see Honeywell Pte Ltd (Singapore)
for: Philippines, Pakistan, Cambodia, Guam, Laos, Myanmar, Vietnam, East Timor

SE Asia Countries

see Honeywell Automation India Ltd for: Bangladesh, Nepal, Sri Lanka

EUROPE

Austria

Honeywell Austria GmbH
Phone: +43 (316)400123
FAX: +43 (316)40017

Belgium

Honeywell SA/NV
Phone: +32 (0)2728 24 07
FAX: +32 (0)2728 22 45

Bulgaria

Honeywell EOOD
Phone: +(359) 2 40 20 900
FAX: +(359) 2 40 20 990

Czech Republic

Honeywell spol. s.r.o.
Phone: +420 242 442 232
FAX: +420 242 442 131

Denmark

Honeywell A/S
Phone: +(45) 39 55 55 55
FAX: +(45) 39 55 55 58

Finland

Honeywell OY
Phone: +358 (0)20752 2753
FAX: +358 (0) 20752 2751

France

Honeywell SA
Phone: +33 (0)1 60198075
FAX: +33 (0)1 60198201

Germany

Honeywell AG
Phone: +49 (69)8064-299
FAX: +49 (69)806497336

Hungary

Honeywell Kft.
Phone: +36-1-451 4300
FAX: +36-1-451 4343

Italy

Honeywell S.p.A.
Phone: +390292146307
FAX: +39 0292146377

The Netherlands

Honeywell B.V.
Phone: +31 (0) 20 5656200
FAX: +31 (0) 20 5656210

Norway

Honeywell A/S
Phone: (45) 39 55 55 55

Poland

Honeywell Sp. zo.o
Phone: +48-22-6060900
FAX: +48-22-6060901

Portugal

Honeywell Portugal Lda
Phone: +351 21 424 5000
FAX: +351 21 424 50 99

Romania

Honeywell Bucharest
Phone: +40 (0) 21 2316437
FAX: +40 (0) 21 2316439

Russian Federation (RF),

Honeywell Field Solutions
Kievskaya str., 7,
Moscow 121059, Russia
Phone +7 (495) 796 98 60
Fax +7 (495) 797 99 64

Slovak Republic

Honeywell s.r.o.
Phone: +421-2-58247 410
FAX: +421-2-58247 415

Spain

Honeywell S.A.
Phone: +34 (0)91313 61 00
FAX: +34 (0)91313 61 30

Sweden

Honeywell AB
Phone: +(46) 8 775 55 00
FAX: +(46) 8 775 56 00

Switzerland

Honeywell AG
Phone: +41 18552448
FAX: +(41) 1 855 24 45

Turkey

Honeywell Turkey A.S.
Phone: +90 216 578 71 00
FAX: +90 216 575 66 35

Ukraine

Honeywell
Tel: +380-44-201 44 74
Fax: +380-44-201-44-75

United Kingdom

Honeywell Control Systems Ltd.
Phone: +44 (0)1344 655251
FAX: +44 (0) 1344 655554

MIDDLE EAST

Abu Dhabi U A E

Middle East Headquarters
Honeywell Middle East Ltd.
Phone: +971 2 4041246
FAX: +971 2 4432536

Sultanate of Oman

Honeywell & Co Oman LLC
Phone: +968 24 701153/
Ext.33
FAX +968 24 787351

Saudia Arabia

Honeywell Turki Arabia Ltd
Jubail Office
Phone: +966-3-341-0140
Fax: +966-3-341-0216
Honeywell - ATCO
Dammam Office
Phone: 0096638304584
Fax: 0096638338059

Kuwait

Honeywell Kuwait KSC
Phone: +965 242 1327 to 30
Fax: +965 242 8315
And
Phone: +965 326
2934/1821Fax: +965 326
1714

AFRICA

Mediterranean & African Distributors

Honeywell SpA
Phone: +39 (02) 250 10 604
FAX: +39 (02) 250 10 659

South Africa (Republic of) and sub saharan

Honeywell Southern Africa
Honeywell S.A. Pty. Ltd.
Phone: +27 11 6958000
FAX +27 118051504

NORTH AMERICA

Canada

Honeywell LTD
Phone: 1-800-737-3360
FAX: 1-800-565-4130

USA

Honeywell Process Solutions,
Phone: 1-800-423-9883
Or 1-800-343-0228
Email: ask-ssc@honeywell.com

SOUTH AMERICA

Argentina

Honeywell S.A.I.C.
Phone: +(54-11) 4383-3637
FAX: +(54-11) 4325-6470

Brazil

Honeywell do Brasil & Cia
Phone: +(55-11) 7266-1900
FAX: +(55-11) 7266-1905

Chile

Honeywell Chile, S.A.
Phone: +(56-2) 233-0688
FAX: +(56-2) 231-6679

Mexico

Honeywell S.A. de C.V.
Phone: +(52) 55 5259-1966
FAX: +(52) 55 5570-2985

Puerto Rico

Honeywell Inc.
Phone: +(809) 792-7075
FAX: +(809) 792-0053

Trinidad

Honeywell Inc.
Phone: +(868) 624-3964
FAX: +(868) 624-3969

Venezuela

Honeywell CA
Phone: +(58-2) 238-0211
FAX: +(58-2) 238-3391

For More Information

Learn more about how Honeywell's ST 3000 FF Pressure Transmitters can increase performance, reduce downtime and decrease configuration costs, visit our website www.honeywell.com/ps/hfs or contact your Honeywell account manager.

Honeywell Process Solutions

1860 West Rose Garden Lane
Phoenix, Arizona 85027
Tel: 1-800-423-9883 or 1-800-343-0228
www.honeywell.com/ps

34-ST-03-72
April 2011
© 2011 Honeywell International Inc.

The Honeywell logo, consisting of the word "Honeywell" in a bold, red, sans-serif font.