


SMART (4 to 20) mA LOOP POWERED DUAL TRIP AMPLIFIER

SEM1636


- DUAL RELAY OUTPUT WITH INDEPENDENT SET ACTIONS
- POWERED FROM (4 to 20) mA LOOP - VOLTAGE BURDEN 5 VOLTS
- RELAY RATING 250V AC 1A ; 30V DC 1A
- NORMAL AND INVERTED LOW/HIGH/DEVIATION RELAY ACTIONS
- OPTIONAL FILTER AND USER LINEARISATION FUNCTIONS
- LED RELAY INDICATION, FAIL ON OR FAIL OFF RELAY ACTIONS
- CONFIGURATION USING USB PORT

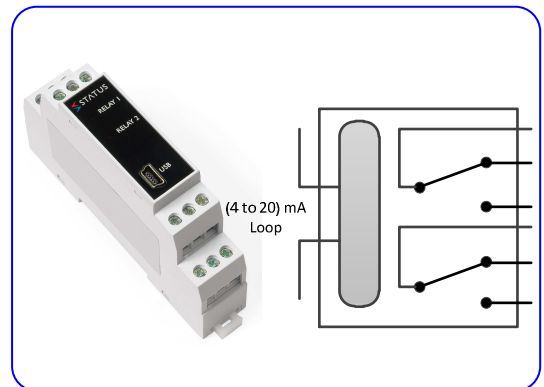

➤ INTRODUCTION

The SEM1636 monitors a (4 to 20) mA loop and provides two independent change over trip contacts set to alarm at any point within the (4 to 20) mA range. The SEM1636 requires no additional power connection as power is derived from the (4 to 20) mA loop. Relay outputs are independently configured for action and set point, dead band. Six actions are provided normal High/Low/Deviation and inverted High/Low/Deviation. Additional math, filter and user linearisation functions are provided.

Designed for ease of use, our USB interface is fitted for quick and easy configuration. Just connect a standard USB cable between the SEM1636 and your PC. Using our free configuration software, the user can configure the device to the required application. To further help save time, the SEM1636 does not need to be wired to a power supply during the configuration process, it is powered via the USB interface from your PC.

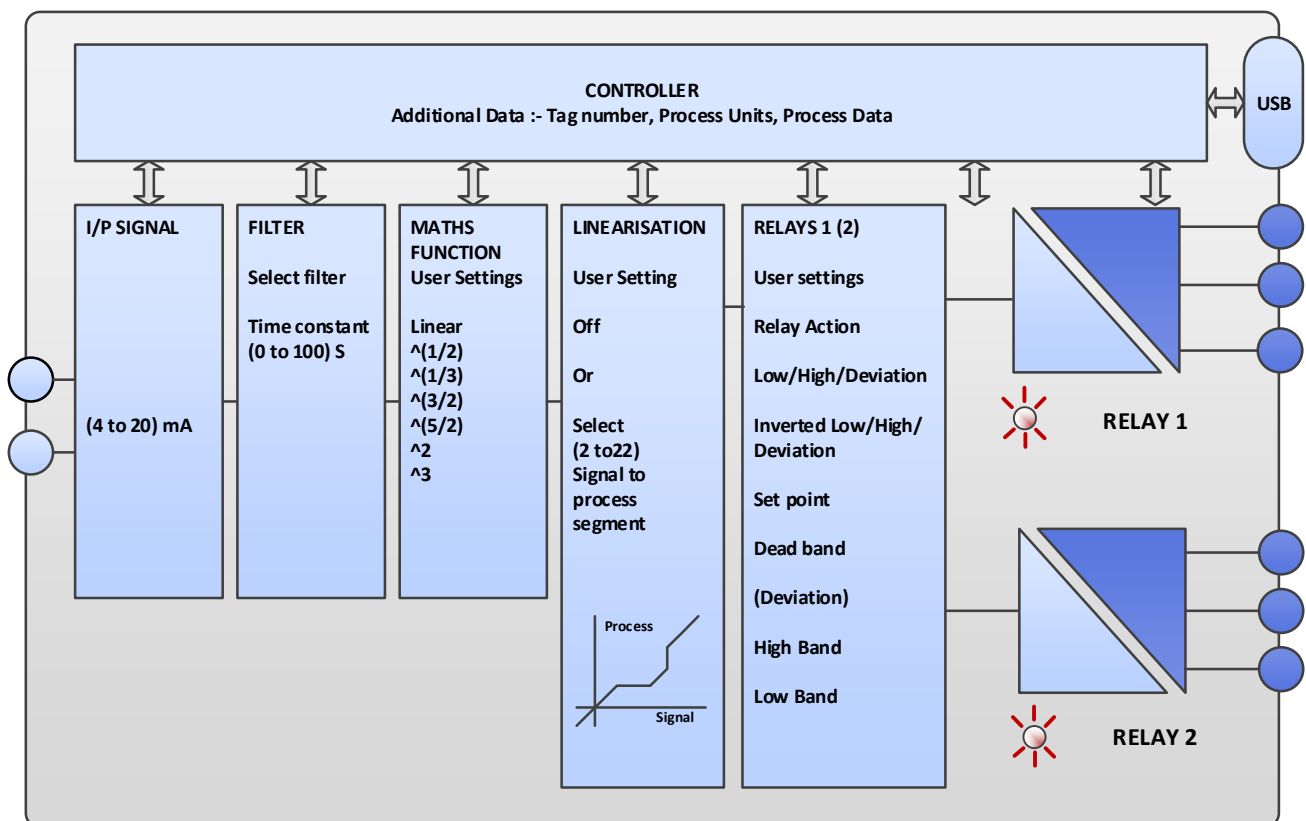

SMART (4 to 20) mA LOOP POWERED DUAL TRIP AMPLIFIER

SPECIFICATION @20 °C

SPECIFICATION @ 20 °C

INPUT

Type	(4 to 20) mA current loop.
Maximum Range	(3.8 to 22) mA Operating ± 50 mA Maximum
Voltage Burden	5 Volts Max.
Update	100 mS
Accuracy	± 0.02 % of full scale deviation
Protection	Reverse connection and over voltage.
Temp. Coefficient	± 0.002 % / °C

RELAY 1

Type	Form C relay contacts
Contact rating	250 V ac rms @ 1 A ; 30 V dc @ 1 A resistive load
Relay Actions	High-Low-Deviation ; Inverted High-Low-Deviation.
Connection	Screw Terminal
Indication	Relay 1 on - Red LED
Protection	Protect with externally fitted 2.0 A (T) fuse
Galvanic Isolation	3750 V ac relay 1 to inputs ; relay 1 to relay 2

RELAY 2

Type	Form C relay contacts
Contact rating	250 V ac rms @ 1 A ; 30 V dc @ 1 A resistive load
Relay Actions	High-Low-Deviation ; Inverted High-Low-Deviation.
Connection	Screw Terminal
Indication	Relay 2 on - Red LED
Protection	Protect with externally fitted 2.0 A (T) fuse
Galvanic Isolation	3750 V ac relay 2 to inputs ; relay 1 to relay 2

USER INTERFACE (CONFIGURATION ONLY)

Type	USB 2.0
Baud rate	19,200 baud
Equipment	PC running windows XP or later, USB cable.

USER INTERFACE FUNCTIONS

Scaling	User mA to process value scaling, for simplified setup.
Filter	Adjustable time constant (0 to 100) Seconds.
Math	Functions Linear, $\wedge(1/2)$, $\wedge(1/3)$, $\wedge(3/2)$, $\wedge(5/2)$, $\wedge 2$, $\wedge 3$.
User Linearisation (Profile)	(2 to 22) segments mA to process.
Process Units	4 Characters
Tag Number	20 Characters
Relay Action	Individual actions for relay 1 and 2
Set point	Individual set points for relay 1 and 2
Dead Band	Individual dead band settings for relay 1 and 2
High/low Band	Individual High/Low Band settings for relay 1 and 2.

ENVIRONMENT

Operating Ambient	(-20 to 70) °C ; (10 to 90) %RH (non condensing)
Storage Ambient	(-30 to 70) °C ; (10 to 90) %RH (non condensing)
Configuration Ambient	(10 to 30) °C
Installation Enclosure	DIN Rail enclosure offering Protection \geq IP65.


APPROVALS

CE	BS EN 61326 BS EN 61010-1 Installation category II pollution degree. The product is classed as "PERMANENTLY CONNECTED EQUIPMENT".
----	---

MECHANICAL

Style	DIN 43880 (1 Module)
Colour	Grey
Material	Polymide 6.6 self extinguishing
Terminals	2.5 mm Maximum
Weight	< 70 grams

Order code: SEM1636

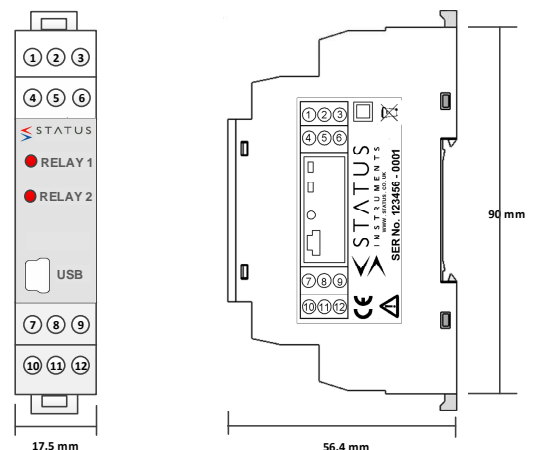

Distribution via
www.fluidic-ltd.co.uk
Glasgow 0141 641 5920
Warrington 01925 572401

