

REP01PU Repeater

Pro standard repeater



Part of the **Hanwell Pro** wireless series, the REP01PU is our standard repeater for use in tough areas where obstacles and wall materials create reduced transmission for Hanwell Pro transmitters.

Features

- ✓ Extended range by 3km over open ground
- ✓ IP30 rated
- ✓ Can be used in conjunction with internal receivers and external transmitters to make jumps between buildings
- ✓ Superior performance hardware
- ✓ Complies with RoHS, EU & WEEE directives
- ✓ Carries CE Marking

Typical Applications

- Extending range across long distance sites
- Reception/transmission to and from shielded areas

Always ask for a long-range signal strength test.



We can prove ours to be unrivalled.



Product code: REP01PU-434.075 (other frequencies are available)

Instrumentation specification

Dimension (Excl. ancillaries)	110 x 80 x 35mm
Weight	300 grams
Power supply	12v plug top power supply
Case material	ABS & PC
Instrument operating temperature range	-20°C to +60°C (non-condensing RH environment)
Instrument operating humidity range	0% to 95% (non-condensing RH environment)
Storage temperature	-20°C to 35°C
IP rating	IP30
Power consumption	0.6 Watts

Radio transceiver functions

Fixed frequency modules	A range of frequencies are available between 433-458 MHz. Country specific regulations apply.
Radio power	10mW
Radio range	3km over open ground
Battery life	Rechargeable battery for use only during mains failure (12 hours maximum back up)
Software required	W900 – Standard EMS Software Package W906 – Validated EMS Software Package *See EMS datasheet for further options
Hardware required	CR3 – Controller SR2 – Smart Receiver
Reaction time at receiver unit	< 5 seconds

Ultimate peace of mind **RoHS**


Version 1 - EC180011

Disclaimer: The information contained herein is believed to be reliable. Hanwell Ltd is not responsible for any Customers should obtain and verify the latest relevant information before placing orders for Hanwell products.

hanwell.com




Tel: +44 (0)1462 688070 | Email: sales@hanwell.com

Schematic - CR3

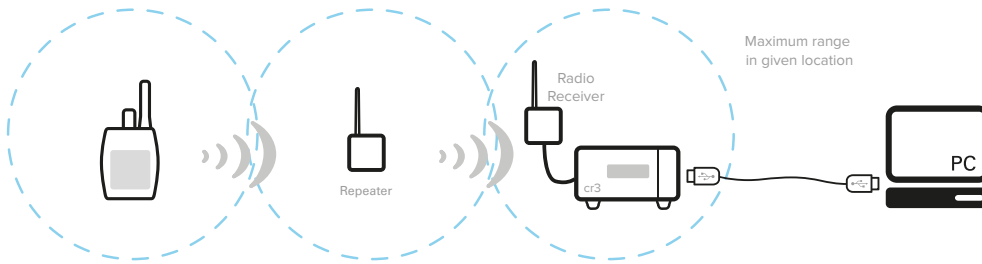

Schematic - SR2

Local Site
One or more SR2's on a main site connected via LAN points




LAN



Network Server
Collects data from all SR2's and is interrogated by Network Users

Remote Site
One or more SR2's from remote sites via LAN or WAN, for example, off-site



LAN
or WAN




Network User
For example, main system administrator



Network User
For example, someone needing weekly reports

Local Site
One or more SR2's on a main site connected via LAN points



LAN



Network User
For example, QA

One system can comprise up to 16 separate sites but all data is treated the same way