

IceSpy Notion Pro

Network Receiver

notion^{pro}

Affordable wireless monitoring
without compromise

The Network Receiver is a network enabled receiver, designed for collecting environmental monitoring data from multiple points within a site. It uses standard TCP/IP communications protocols for speedy data handling. The network traffic generated is very low and data is automatically sorted and filed.



The unit is designed to be in constant communication with the software but has user-configurable fall-back behaviour in the event of network or power failure. An on-board battery that lasts up to 5 days and a memory to last for a minimum of 5 days for 50 sensors.

Front panel LED indication for alarm (red) power (green) and communications (yellow).

The unit is mains powered using 12V DC power supply.

Features

- Optional wifi communication
- On-board relays configured for common alarm and power failure
- Battery back up for 5 days
- Easily accessible battery for replacement by the user, when required
- ARB module incorporates a wall mountable bracket
- Up to 5 years battery life
- Complies with BS EN 12830
- Complies with RoHS, EU directives and WEEE
- Carries CE Marking

Benefits

- Small discreet unit easy to position
- Clear status LEDs
- On-board battery back-up
- On-board back-up memory
- Reliable radio


Always ask for a
**long-range signal
strength test when
buying any radio
system.**
We can prove ours
to be unrivalled.

TECHNICAL SPECIFICATIONS

Product Code: IN-NR001F1

Dimensions:	195 x 148 x 45mm	
Weight:	450g	
Case materials:	ABS	
IP rating:	IP53	
Operating Temp:	0°C to +40°C	0-100% RH non-condensing
Storage Temp:	-40°C to +85°C	
Radio Frequency:	433-434MHz Band	
Radio Protocol:	Frequency hopping for greater security	
Power Supply:	12VDC via external universal power supply. Power supply included. (IMC recommend only IMC approved power supplies stock code: G422)	
Battery Back Up:	Up to 5 days	
Battery Type:	7 x 1.5V NiMH Pack	
Memory Back-up:	5 days up to 50 sensors	
Communications:	TCP/IP Via RJ45 connector Wi-Fi option available	
Outputs:	Relay 1 Common Alarm (NO or NC) Relay 2 Power Failure (Held closed when powered) Both relays volt free RS485	
LED Indication:	Red (Alarm) Yellow (Network Comms) Green (Power/Radio Comms)	

Schematic:

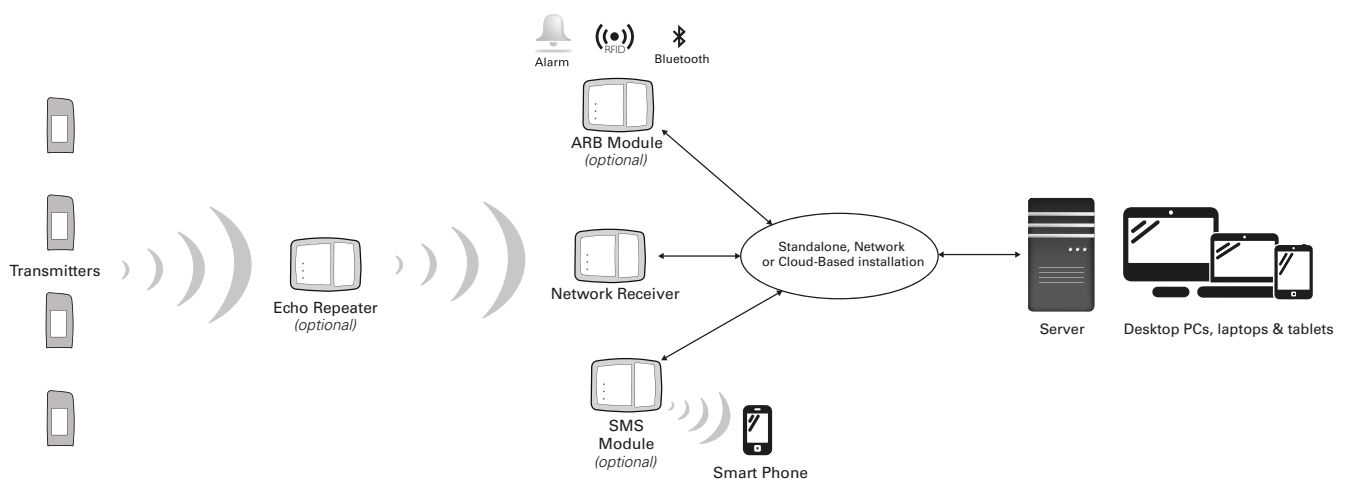

Disclaimer

The information contained herein is believed to be reliable. The IMC Group Ltd is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice. Customers should obtain and verify the latest relevant information before placing orders for IMC products.



Version 2