

# ARGUS

## LOW PRESSURE P510 ARGUS ATEX/ IECEX, Exia CERTIFIED & INDUSTRIAL LOW PRESSURE SWITCH

This range of switches employs a non-reinforced elastomer sensing element for settings between 8 and 250 mbar. Reliable and proven design concepts from our established range of switches have also been incorporated. This provides a very competitively priced, lightweight and durable sensor.



**LOW  
PRESSURE**

## FEATURES

- ✓ 316 stainless steel or PPS engineering polymer switchcase to IP66/IP67 standards.
- ✓ Internal adjustment scale.
- ✓ Settings from 8 to 250 bar.
- ✓ Single or dual microswitch option.
- ✓ Wetted parts NACE MR-01-75 compliant.
- ✓ SIL 2 - IEC 61508 proven reliability
- ✓ ATEX/IECEX Intrinsically Safe  
CE Ex II 1G Exia IIC T6...T2  
T6...T5 T amb -50 to +78°C  
T5...T2 T amb -50 to +93°C

ADJUSTMENT RANGE (mbar)	ADJUSTMENT RANGE "wg	MAX WORKING PRESSURE (bar)	DEADBAND (mbar)	SPRING CODE	DIAPHRAGM CODE
50 - 250	20 - 100	7.0	6 - 20	T	FS3
8 - 128	5 - 50	5.0	3 - 12	T	FS4



# ARGUS ATEX/IECEX Exia & INDUSTRIAL SWITCHES

## INTRODUCTION

The Argus pressure, differential pressure, temperature, level and flow switches are designed for use in environments where explosive gases and extremes of both high and low ambient temperature can be present (e.g. gas fields, oil rigs and chemical plants etc.) They have been ATEX & IECEx certified suitable for CAT 1 CE Ex II1G Exia IIC environments.

These switches are manufactured from either PPS (engineering polymer) or high quality investment cast 316 stainless steel, both offering a robust construction and protection to IP66/IP67 for use within heavily polluted industrial and marine environments. Declaration available for SIL2 - IEC61508 proven reliability.


## CALIBRATION

The design features a simple form of calibration adjustment against a scale block. This allows users to either order units with a specific setting, or stock a mid range setting and then adjust to suit the application.

On removal of the adjustment cover the adjusting screw can be turned with a Tommy bar. The setting is read from the centre of the red indicating ring against the internal scale plate. Rotation to the left will increase the set point and to the right decrease the set point.

The adjustment mechanism incorporates a friction device to ensure set point will not change under vibration conditions.

(For ultra low pressure, vacuum and differential pressure switches the switchcase in inverted. Set point adjustment will be opposite to that shown above)

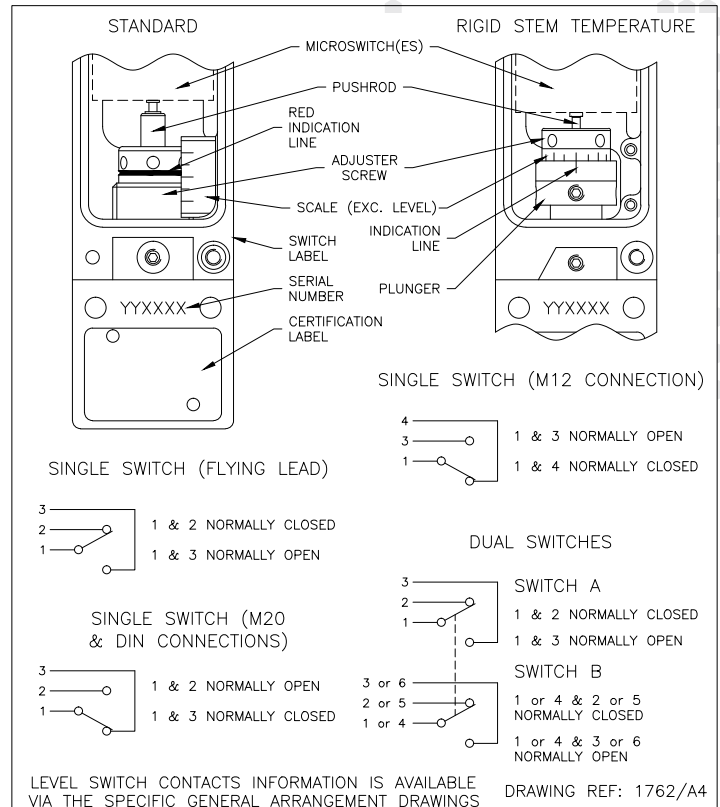

## TECHNICAL SPECIFICATION

**Switchcase and covers:** 316 Stainless steel or PPS (Polyphenylene Sulphide) + stainless steel fibres engineering polymer.

**Environmental Protection:** Switches have been tested and certified by an external test house to IP66/IP67 in accordance with EN 60529:1992+A2:2013 and IEC 60529:1989:A1:1999+A2:2013.

**Vibration and shock parameters:** Switches have been tested and certified by an external test house to BS EN 60068-2-6 : 1995 (test Fc vibration) and BS EN 60068-2-27 : 1987 (test Ea shock).

**Microswitch:** 1 or 2 SPDT (dual switches mechanically linked to give DPDT).

**Microswitch rating:** 5 Amps @ 250 VAC resistive, 2 Amps @ 250 VAC inductive.  
5 Amps @ 30VDC resistive, 2 Amps @ 30 VDC inductive.

**Accuracy:** +/-1% at 20°C.

# ELECTRICAL CONNECTION EXIA AND INDUSTRIAL

**Plug & Socket:** DIN EN 175301-803-A (was DIN 43650) Plug and socket suitable for unarmoured cable up to 1.5mm<sup>2</sup>. Cable OD between 4.5mm (PG11).

**M20 x 1.5 ISO female:** 3 terminals suitable for cables upto 1.5mm<sup>2</sup>.

**M12 x 1 Circular socket:** 3 contacts, A-coded plug to IEC61076-2-101.

**Flying lead:** 1 metre of 3 core, for single switch (6.8mm diameter) or 7 core, for dual switches (9.2mm diameter) Silicone insulated flying lead with M20 x 1.5 ISO or 1/2" NPT male threaded conduit gland (part number code R & S) or one, for single switch 1 metre of 3 core cable or two, for dual switches 1 metre of 3 core cable supplied with no thread (part number code A). Longer lead lengths can be requested and a range of junction boxes can be supplied fitted and wired to the switch. The standard Exe box has an ambient temperature range of -40 to +55°C. Higher temperatures can be catered for.

## CERTIFICATION: ALL SWITCHES ARE CE MARKED IN ACCORDANCE WITH EU DIRECTIVES

**Exia Intrinsically Safe:** ATEX 2014/34/EU marked CE Ex II 1G Exia IIC T6...T2 Ga, T6...T5 T amb -50 to +78°C, T5...T2 T amb -50 to +93°C

**Special conditions for safe use.** During live maintenance, adjustment or servicing of the equipment the aluminium parts may be exposed. Care should be taken to avoid the risk of ignition from incendive impact or abrasion sparks. The DIN plug cover is made of non-conductive plastic material. Care shall be taken to avoid electrostatic discharge during maintenance, adjustment or servicing. Clean only with a damp cloth.

**Industrial:** 2014/35/EU (Low voltage directive).

## TEMPERATURE LIMITATIONS

**Pressure, Vacuum and Differential Pressure.**

**Process temperature:** Diaphragm actuated unless otherwise stated -30 to +100°C (Nitrile) or -20 to +150°C (Viton). Piston actuated -30 to +100°C (Nitrile) or -20 to +150°C (Viton) or -40 to +150°C (PTFE) -35 to +100°C (EPDM).

**Ambient temperature:** -40 to +85°C (-50°C & +125°C options – refer to sales office).

**Storage temperature:** -40 to +85°C (For temperature, level and flow switches please refer to specific pages).

**Certification temperature:** (Exia only) T6...T5 T amb -50 to +78°C, T5...T2 T amb -50 to +93°C. Please refer to ATEX & IECEx certificate showing permitted process temperature in relation to temperature class.

Continuous development may result in changes to specification without prior notice

## ABOUT PYROPRESS

Our products are designed to work in demanding and hazardous environments which require fast and cost effective solutions in instrumentation and control.

Pyropress control sensors provide safe and reliable electrical switching of alarm or control circuits in response to changes in temperature, pressure, differential pressure, vacuum, flow and level conditions.

## QUALITY

To support the design of state of the art products the company has invested heavily in the latest CNC technology.

We are able to produce our own components to a high degree of accuracy assuring a reliable and consistent quality product.